




HINGELINK ALUMINIUM ANCHOR



Product Code: HINGE002

- Designed for use on metal/timber structures where there is easy access to the underside of the roof.
- Affords flexible means of attachment to timber.
- Can also be used with tile on timber.
- 316 Stainless Steel Eyebolt with Aluminium base.
- Complies with Australian and New Zealand Standard AS/NZS 1891.4.
- Single Person Anchor.
- Rated at 15kN.

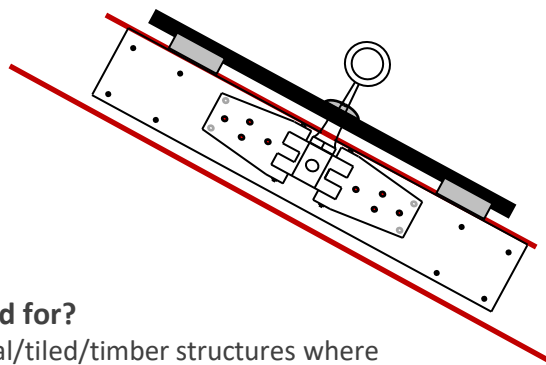

What am I used for?

An anchor point designed for use on metal/tiled/timber structures where there is easy access to the underside of the roof. The base of the unit is hinged enabling flexible means of attachment.

POSITIONING OF HINGELINK ANCHOR POINT

(refer to appendix diagrams 2 and 3 of the Handbook)

The first HingeLink anchor point must be in a position easily and safely reached by a secured ladder or a manhole access area.

INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with Australian Building Codes.

COMPONENTS:

PRODUCT CODE	PRODUCT DESCRIPTION	QUANTITY
HINGE002.01	Rubber Hat Washer 75mm	1
HINGE002.02	Hingelink Base: Aluminium with Base Plates	1
HINGE002.03	Standard Eyebolt 316 SS with Locking Hex Nut	1
HINGE002.04	HingeLink 1 x SIDE PLATE ONLY	1



INSTALLATION
HANDBOOK

Product Sheet: HINGE002 Version 09.16

SafetyLink Pty Ltd | ABN 83 081 777 371 | PO Box 88 | Hawks Nest NSW 2324 | Australia

Phone: 1300 789545 or +61 249 641068 | Fax: 1300 738071 or +61 249 641069

safetylink@heightsafety.com.au | www.heightsafety.com




This is a guide only


POSITIONING LAYOUT INSTALLATION HANDBOOK - DIAGRAM 2

All working at heights safety procedures must be complied with when installing SafetyLink anchor points. For more information refer to your state or territories current legislation, regulations, policies and codes of practices.

**SPACING MUST BE NO GREATER THAN THE RAFTER LENGTH
PLEASE CONTACT YOUR DISTRIBUTOR IF YOU ARE UNSURE**

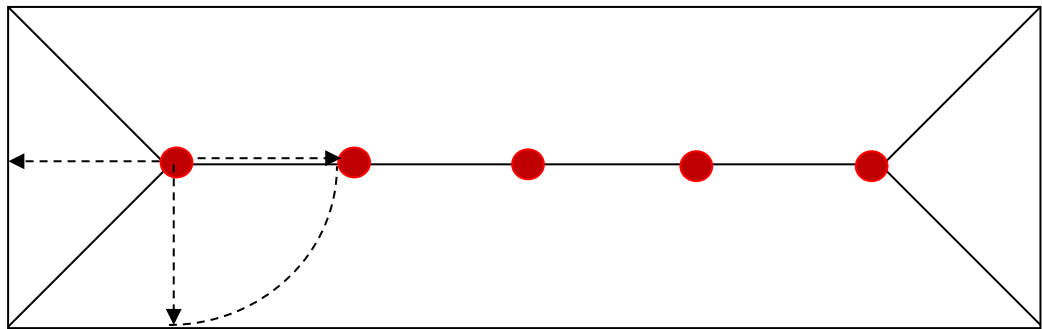

ACCESS, LAYOUT & USE OF A SAFETYLINK ANCHOR SYSTEM
SafetyLink anchor points are positioned by calculating the pendulum effect, this limits the likelihood of a fall past the edge of the roof space. The pendulum effect still applies to a flat roof.

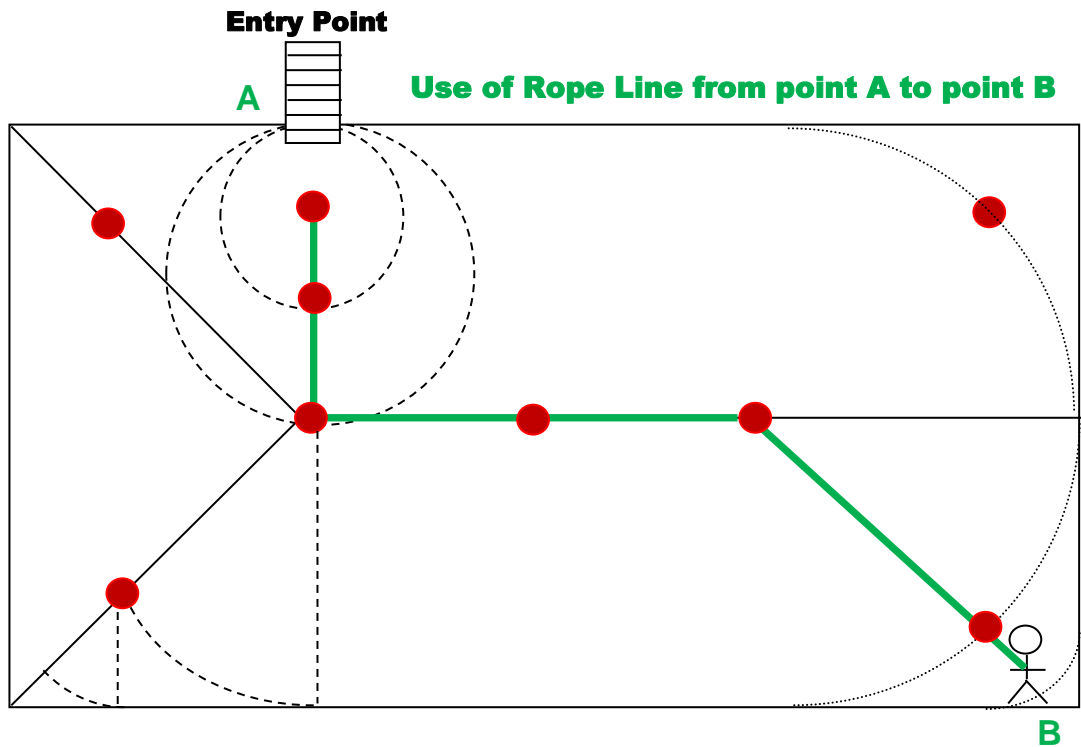

SAFETYLINK HEIGHT SAFETY SYSTEMS MUST ONLY BE INSTALLED AS PER OUR INSTALLATION GUIDES, TO STRUCTURES AS SPECIFIED IN THE INSTALLATION MANUAL FOR EACH PRODUCT. SHOULD ANY DOUBT EXIST IN REGARDS TO THE STRUCTURES INTEGRITY AN ENGINEER SHOULD BE CONSULTED.



COPYRIGHT TERMS AND CONDITIONS

Copyright in the material contained on this disc/email belongs to SafetyLink Pty Ltd. You are authorised to reproduce this material subject to the following conditions:

1. No changes to the material may be made without SafetyLink Pty Ltd's prior written consent, which consent may be withheld, granted, or granted subject to conditions in SafetyLink Pty Ltd's discretion. Change includes any alteration, addition or deletion to the material or a part of the material that you reproduce.
2. You must ensure that any material you reproduce is marked "Copyright – SafetyLink Pty Ltd 2006".
3. Where you reproduce parts only of the material that must not cause the part reproduced to be misleading in any way or omit any important safety information.
4. You indemnify SafetyLink Pty Ltd against any claim arising out of your reproduction of the material on this disc/email or any part of it.
5. SafetyLink Pty Ltd can terminate this authority to reproduce this material on 7 day's notice in writing to you at your last known business address, for any reason. You must return this disc/email to SafetyLink Pty Ltd immediately after such a termination takes effect.

If you do not accept these conditions please return the disc/email to SafetyLink Pty Ltd. Your retention of the disc/email will otherwise be evidence of your acceptance of these conditions.

Patents

SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued.

Should you wish to know the progress of our intellectual property on a specific product please email us on ip@heightsafety.com.au and quote the product code.



Anchor
Catalogue



Anchor
Installation
Manual



Lifeline
Catalogue
&
Manuals



Ladder
Catalogue



Ladder
Installation
Manual



FrogLink
Installation
Video



TileLink
Installation
Video